

GLULAM

INFORMATION SHEET



MALAYSIAN TIMBER COUNCIL

The Malaysian Timber Council was established in 1992 to promote Malaysian timber-based products globally. The Council strives to ensure the continued development of the Malaysian timber industry by improving its competitiveness, enhancing market access and creating trade opportunities.

For further information:
MALAYSIAN TIMBER COUNCIL
18th Floor, Menara PGRM
No. 8, Jalan Pudu Ulu, Cheras
56100 Kuala Lumpur
Tel: +60 3 9281 1999
Fax: +60 3 9282 8999
Email: council@mtc.com.my

The Council also has offices
in London, Dubai & Guangzhou.



UNIQUELY GLULAM

Glued Laminated Timber (Glulam) is a high strength engineered wood material. Finger-jointed pieces of strength-graded solid timber (lamellae) are glued together to form large structural members such as beams and columns.

The unique characteristics of Glulam allow for larger sizes and complex curved shapes that are not possible with other building materials.

In commercial construction, Glulam beams may span distances up to 30 metres. Glulam trusses and arches can span even larger distances. In residential construction, Glulam can be used as columns, bearers or floor beams, floor joists, roof beams, rafters and ridge beams located at the apex of a pitched roof structure.

Glulam's high strength-to-weight ratio makes it easier to handle as compared to equivalent steel and concrete elements.

As main structural members, it is critical that Glulam members are appropriately designed and manufactured to ensure reliable performance.

MANUFACTURE

Glulam is a highly engineered product and must be manufactured in a strict controlled environment that meets certain quality control requirements:-

- Strength graded lumber
- Adhesives with stringent requirements for strength and durability
- Daily quality control tests as specified by appropriate standards for Glulam
- Keeping records of every production

Glulam manufacturers can produce virtually any size, section and profile, subject to transportation limitations.

QUALITY ASSURANCE AND MARKING

The excellent quality of Glulam members should be guaranteed by a continuous and rigorous internal quality control. Quality control is audited by a third party agency to ensure that the manufacture of Glulam members conforms to certain standard requirements.

Glulam should have appropriate markings that include:-

- Name of manufacturer
- Certificate number
- Standard number (e.g., MS 758, BS EN 14080, etc.)
- Adhesive type
- Timber species
- Date of manufacture or batch number





Yellow Treehouse, New Zealand
Credit: Pete Eising, Pacific Environments Architects / LucyG Photography





The Winter Garden, UK
Credit: Communication Service, Sheffield City Council

INDICATORS OF NON-CONFORMING GLULAM


It is not always possible to distinguish Glulam that are properly manufactured and those that are not. Many of the stringent required inputs that make up a proper Glulam member are not visible in the finished product. In other words, it is very easy to pass off a poorly made Glulam member to the unsuspecting buyer. The illustrations on this page provide some guidelines and obvious indicators to distinguish proper Glulam members from non-conforming Glulam.

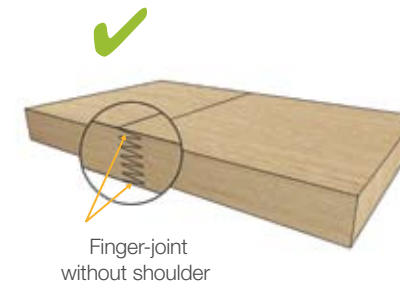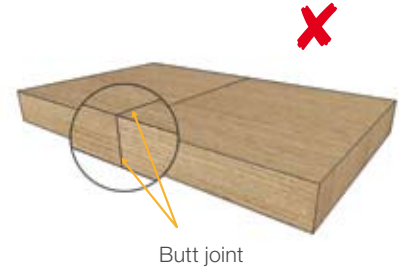

Structural finger-joints are without shoulders. Butt joints are not allowed.

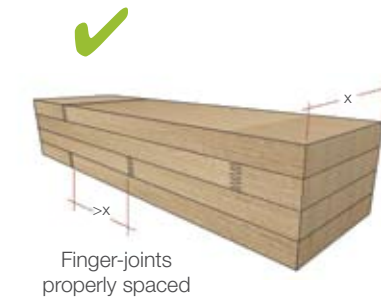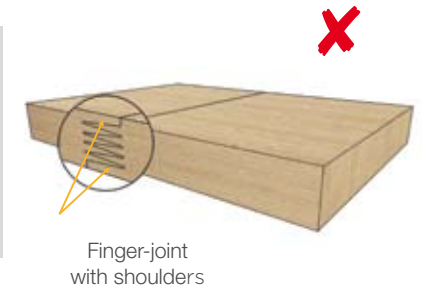


Spacing of finger-joints must be greater than the width of the beam.

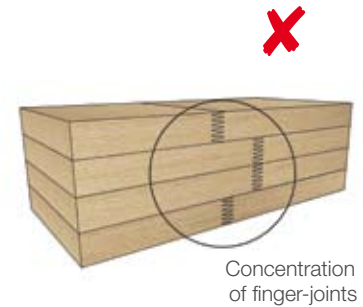

x = width of Glulam



Lamellae must be properly staggered.

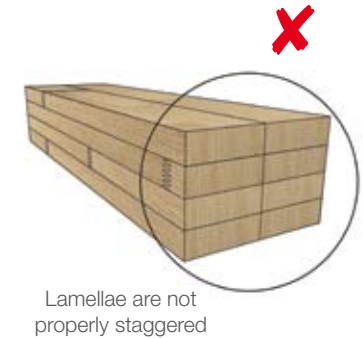

Lamellae must be of uniform thickness.

